

## 2.3 Schlüter®-JOLLY

### WALL CORNERS & TRANSITIONS

#### FOR DECORATIVE EDGE PROTECTION

### Application and Function

Schlüter®-JOLLY is a finishing profile that protects the outside corners of tiled wall surfaces against damage. The range of available sizes and finishes permits the matching of the profile to a wide variety of tile and grout colours, or allows many design opportunities through the use of contrasting colours.

Other applications include dado coverings and transitions for coverings such as carpet, natural stone, or epoxy resin fillings for wall areas.

In addition to the profile's decorative effect, the tiles are protected against damage caused by mechanic stresses along the edges. The integrated joint spacer forms a defined joint cavity with the tile.

### Material

Schlüter®-JOLLY is available in the following materials and finishes:

- MC = Solid brass, chrome-plated
- AC = Alu., colour coated
- AMG = Alu., polished brass anodised
- ACG = Alu., polished chrome anodised
- P = PVC, coloured

Note: Profiles in brass, aluminum, satin anodised aluminium, and stainless steel are included in the Schlüter®-SCHIENE range.




### Material Properties

#### and Areas of Application:

In special cases, the suitability of a proposed type of profile must be verified, based on anticipated chemical, mechanical, and/or other stresses.

Schlüter®-JOLLY-AC (colour coated aluminium):

The aluminium is pretreated (chromated), then colour-coated with a polyurethane powder coat. The coating is colour-stable, UV-resistant, and suitable for exterior use. Protect the profile against abrasion or scratching.

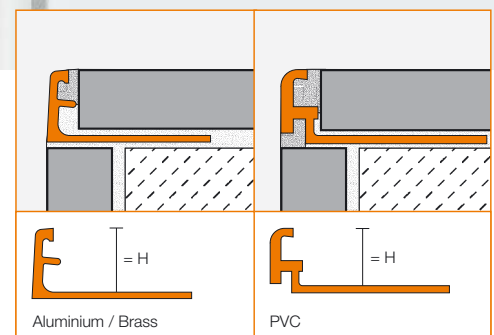



Schlüter®-JOLLY-MC (chrome-plated solid brass) is a finishing profile that is especially well suited for wall corners and transitions. It is ideal for matching chrome fixtures. Surface areas must be protected against abrasion or scratching.

Schlüter®-JOLLY-ACG/-AMG (anodised aluminium):

The aluminium features a surface refined by an anodised layer that does not alter during normal use. Surface areas must be protected against abrasion or scratching. Cementitious materials, in conjunction with moisture, become alkaline. Since aluminium is sensitive to alkaline substances, exposure to the alkali (depending on the concentration and penetration time) may result in corrosion (aluminium hydroxide formation). Therefore, it is important to remove adhesive or grout residue from visible surfaces. In addition, ensure that the profile is solidly embedded in the setting material and that all cavities are filled to prevent the collection of alkaline water.



Schlüter®-JOLLY-P (coloured PVC) is made of pre-coloured, rigid PVC which resists bending or scratching. The material is UV-resistant, although it is not permanently colour-stable in exterior applications. It is not suited for corners or transitions subjected to heavy mechanical loads, e.g. at step edges or floor transitions.

Schlüter®-SCHIENE-M, -A, -AE, -E:  
Refer to the various finishes and materials for Schlüter®-SCHIENE which can be used in similar applications as the Schlüter®-JOLLY.

### Installation

1. Select Schlüter®-JOLLY according to tile thickness.
2. Trowel tile adhesive over the area that forms the perimeter of the tiled covering. If used at outer wall corners, finish tiling one wall first, then apply tile adhesive to the corner area of the second wall.
3. Press the perforated anchoring leg of the Schlüter®-JOLLY into the tile adhesive and align.
4. Trowel additional adhesive over the perforated anchoring leg to ensure full coverage.
5. Firmly press the adjoining tiles into place and adjust them in such a way that the upper lip of the profile is flush with the tile. Ensure full coverage when setting tiles in the profile area.
6. The tile is set to the lateral joint spacer, which ensures a uniform joint of 1.5 mm. With the stainless steel profiles, leave a space of approximately 1.5 mm.
7. Fill the joint completely with grout.
8. Work with materials and tools that will not scratch or damage sensitive surfaces. Setting materials must be removed immediately, especially on aluminium.

### Maintenance

Schlüter®-JOLLY does not require any special maintenance. Do not use abrasive cleansing agents on sensitive areas.



**Product overview:**

**Schlüter®-JOLLY-P**

P = PVC coloured

Length supplied: 2.50 m

Material	W	BW	BH	SP	PG	HG	GS
H = 4.5 mm	•	•				•	
H = 6 mm	•	•	•	•	•	•	•
H = 8 mm	•	•	•	•	•	•	•
H = 10 mm	•	•	•	•	•	•	•
H = 12.5 mm	•	•				•	

**Schlüter®-JOLLY-AC**

AC = Aluminium colour coated

Length supplied: 2.50 m

Material	W	BW	HB	BH	G	HG	PG	RB	SB	GM
H = 3 mm	•	•	•	•	•	•	•	•	•	•
H = 4.5 mm	•	•	•	•	•	•	•	•	•	•
H = 6 mm	•	•	•	•	•	•	•	•	•	•
H = 8 mm	•	•	•	•	•	•	•	•	•	•
H = 10 mm	•	•	•	•	•	•	•	•	•	•
H = 12.5 mm	•	•	•	•	•	•	•	•	•	•

Colours:

W = white, BW = brilliant white, BH = bahama, PG = pastel grey, G = grey, HG = light grey, HB = light beige, SP = soft peach, RB = red brown, SB = black brown, GM = grey metallic, GS = black

**Schlüter®-JOLLY-AG**

ACG = Alu., polished chrome anodised

AMG = Alu., polished brass anodised

Length supplied: 2.50 m

Material	ACG	AMG
H = 6 mm	•	•
H = 8 mm	•	•
H = 10 mm	•	•
H = 12.5 mm	•	•



**Schlüter®-JOLLY-MC**

MC = Solid brass, chrome-plated

Length supplied: 2.50 m

Material	MC
H = 6 mm	•
H = 8 mm	•
H = 10 mm	•
H = 12,5 mm	•



### Text template for tenders:

Supply for tiled wall coverings  
\_\_\_\_\_ per metre Schlüter®-JOLLY as  
a finishing and corner profile with a trapezoid-  
perforated anchoring leg and an 87° angled  
section with a widened top flange, and install  
according to manufacturer's specifications.

#### Material:

- -AC = Aluminium, colour coated
- -MC = Solid brass, chrome-plated
- -ACG = Alu., polished chrome anodised
- -AMG = Alu., polished brass anodised
- -P = PVC, coloured

Profile height: \_\_\_\_\_ mm

Colour: \_\_\_\_\_

Art.-No.: \_\_\_\_\_

Material: \_\_\_\_\_/m

Labour: \_\_\_\_\_/m

Total: \_\_\_\_\_/m